
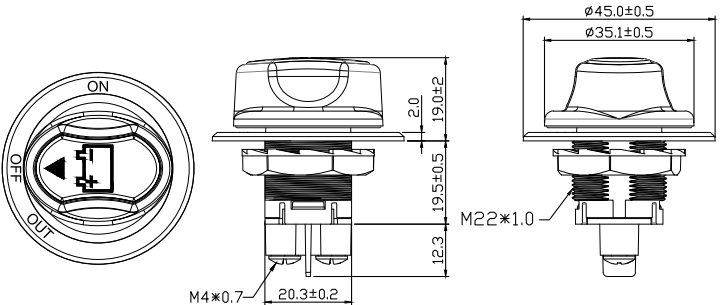


# S23-6

## Battery Switch


- Housing : Black, PA#66+33%GF, with white hot stamping.
- Actuator : Red, PBT+15%GF.
- Name Plate : White, ABS with black hot stamping.
- Bottom : Black, PBT+15%GF.
- Nut : Black, POM.
- Screw : Ni-plated, Brass.

Product	Part No.	Specification			
	S23-6	Continuous Rating	50Amps 50VDC Max	Insulation Resistance	DC 500V 100MΩ Min
		Contact Resistance	50MΩ Max	Dielectric Strength	AC 1000V 1minute DC 2000V 1minute
		Intermittent Rating	75Amps	Switch Function	2P SPST OFF-ON
		Cranking Rating	300Amps 5 sec	Operating Temperature	-30°C~+60°C
<b>International Standards</b>					

# S23-7

## Battery Switch

- Housing : Black, PA#66+33%GF, with white hot stamping.
- Actuator : Red, PBT+15%GF.
- Name Plate : White, ABS with black hot stamping.
- Bottom : Black, PBT+15%GF.
- Nut : Black, PA#66.
- Screw : Ni-plated, Brass.

Product	Part No.	Specification			
	S23-7	Continuous Rating	100Amps 32VDC Max	Insulation Resistance	DC 500V 100MΩ Min
		Contact Resistance	50MΩ Max	Dielectric Strength	AC 1000V 1minute DC 2000V 1minute
		Intermittent Rating	150Amps	Switch Function	2P SPST OFF-ON
		Cranking Rating	500Amps 5 sec	Operating Temperature	-30°C~+60°C
<b>International Standards</b>		